



شکل

کلاس دقتی


طول لبه برنده

جهت براده برداری

A	B	C	D
E	H	K	L
M	O	P	R
S	T	V	W
N			


Symbol	d(mm)	m(mm)	S(mm)				
<b>D</b>	<b>M</b>	<b>S</b>	<b>J</b>				
A	± 0.025	± 0.005	± 0.025	J	$\pm 0.05$ $a \pm 0.15$	± 0.005	± 0.025
C	± 0.025	± 0.013	± 0.025	K	$\pm 0.05$ $a \pm 0.15$	± 0.013	± 0.025
E	± 0.025	± 0.025	± 0.025	L	$\pm 0.05$ $a \pm 0.15$	± 0.025	± 0.025
F	± 0.013	± 0.005	± 0.025	M	$\pm 0.05$ $a \pm 0.15$	$\pm 0.08$ $a \pm 0.20$	± 0.13
G	± 0.025	± 0.025	± 0.013	N	$\pm 0.05$ $a \pm 0.15$	$\pm 0.08$ $a \pm 0.20$	± 0.025
H	± 0.013	± 0.013	± 0.025	U	$\pm 0.08$ $a \pm 0.25$	$\pm 0.13$ $a \pm 0.38$	± 0.13

Inscribed Circle (inch)	Inch	Metric					
		C	D	R	S	T	W
1/4"	2	06	07	06	11	11	04
3/8"	3	09	11	09	16	16	06
1/2"	4	12	15	12	22	22	08
5/8"	5	16	19	15	27	27	10
3/4"	6	19	23	19	33	33	13
1"	8	25	31	25	44	44	17

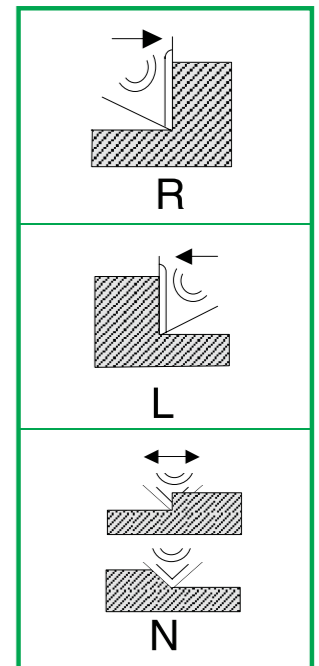

نمونه

**A P K T 16 04 PD E R**

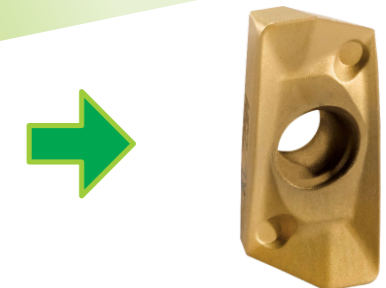

زاویه آزاد

N		0°
B		5°
C		7°
P		11°
D		15°
E		20°

نوع

	<b>N (E)</b>		<b>H</b>
	<b>F</b>		<b>B</b>
	<b>R</b>		<b>T</b>
	<b>A</b>		<b>W</b>
	<b>G</b>		
	<b>M</b>		
	<b>X</b>		

ضخامت

ضخامت		نماد	
inch	mm	Inch	Metric
1/32	0.79	0.5(1)	-
1/16	1.59	1(2)	1
5/64	1.98	1.2	T1
3/32	2.38	1.5(3)	2
1/8	3.18	2	3
5/32	3.97	2.5	T3
3/16	4.76	3	4
7/32	5.56	3.5	5
1/4	6.35	4	6
5/16	7.94	5	7
3/8	9.52	6	9
7/16	11.11	7	11
1/2	12.7	8	12

طرح / شعاع نوک اینسرت

شعاع نوک	نماد		طرح
	Inch	mm	
1/64"	04	1	PD
1/32"	08	2	45° A A 3°
			60° D B 5°
			75° E C 7°
			85° F D 15°
3/64"	12	3	90° P E 20°
			Other angle Z F 25°
1/16"	16	4	G 30°
			N 0°
5/64"	20	5	P 11°
			Z Other angle
3/32"	24	6	
1/8"	32	8	

آماده سازی لبه

